



310 Genius Drive  
Winter Park, FL 32789  
Phone: 407-629-0500  
Fax: 407-645-5376  
sales@osddisplays.com  
www.osddisplays.com

---

**Customer:** \_\_\_\_\_  
**Model Name:** OSD050TN23 V.1  
**SPEC NO.:** A050-23-TT-11  
**Date:** 2007/06/05  
**Version:** 01

**For Customer's Acceptance**

| Approved by | Comment |
|-------------|---------|
|             |         |

| Approved by | Reviewed by | Prepared by |
|-------------|-------------|-------------|
|             |             |             |

# Record of Revision

| Version       | Revise Date | Page | Content         |
|---------------|-------------|------|-----------------|
| Final-Spec.01 | 2007/06/05  |      | Initial Release |

# Contents

|  |    |
|--|----|
| 1. General Specifications.....         | 1  |
| 2. Pin Assignment .....                | 2  |
| 3. Operation Specifications .....      | 5  |
| 3.1. Absolute Maximum Rating .....     | 5  |
| 3.2. Typical Operation Conditions..... | 6  |
| 3.3. Power Sequence .....              | 7  |
| 3.4. Timing Characteristics .....      | 8  |
| 3.4.1. Timing Conditions.....          | 8  |
| 3.4.2. Timing Diagram .....            | 10 |
| 4. Optical Specification.....          | 13 |
| 5. Reliability Test.....               | 17 |
| 6. General Precautions .....           | 18 |
| 6.1. Safety .....                      | 18 |
| 6.2. Handling .....                    | 18 |
| 6.3. Static Electricity.....           | 18 |
| 6.4. Storage .....                     | 18 |
| 6.5. Cleaning .....                    | 18 |
| 7. Mechanical Drawing.....             | 19 |
| 8. Package Drawing .....               | 20 |
| 8.1. Packaging Material Table.....     | 20 |
| 8.2. Packaging Quantity.....           | 20 |
| 8.3. Package Drawing.....              | 21 |

# 1. General Specifications

| No. | Item                        | Specification                | Remark |
|-----|-----------------------------|------------------------------|--------|
| 1   | LCD size                    | 5.0 inch(Diagonal)           |        |
| 2   | Driver element              | a-Si TFT active matrix       |        |
| 3   | Resolution                  | 640X(RGB)X480                |        |
| 4   | Display mode                | Normally White, Transmissive |        |
| 5   | Dot pitch                   | 0.0529(W)X0.1587(H) mm       |        |
| 6   | Active area                 | 101.568(W)X76.176(H) mm      |        |
| 7   | Module size                 | 117.65(W)X88.43(H)X5.7(D) mm | Note 1 |
| 8   | Surface treatment           | Anti-Glare                   |        |
| 9   | Color arrangement           | RGB-stripe                   |        |
| 10  | Interface                   | Digital                      |        |
| 11  | Backlight Power consumption | 1.500W(Typ.)                 | Note 2 |
| 12  | Panel Power consumption     | 0.660W(Typ.)                 | Note 3 |
| 13  | Weight                      | 75g(Typ.)                    |        |

Note 1: Refer to Mechanical Drawing.

Note 2: Including LED Driver power consumption.

Note 3: Including T-con Board power consumption.

## 2.Pin Assignment

### TFT LCD Panel Driving Section


Note: FPC connector is used for the module electronics interface. The recommended model is FH12-40S-0.5SH manufactured by HiRose.

| Pin No. | Symbol           | I/O | Function                                 | Remark  |
|---------|------------------|-----|--|---------|
| 1       | V <sub>LED</sub> | P   | Power voltage for LED circuit            |         |
| 2       | V <sub>LED</sub> | P   | Power voltage for LED circuit            |         |
| 3       | ADJ              | I   | Adjust the led brightness with PWM Pulse | Note1,2 |
| 4       | G <sub>LED</sub> | P   | Ground for LED circuit                   |         |
| 5       | G <sub>LED</sub> | P   | Ground for LED circuit                   |         |
| 6       | V <sub>CC</sub>  | P   | Power voltage for digital circuit        |         |
| 7       | V <sub>CC</sub>  | P   | Power voltage for digital circuit        |         |
| 8       | MODE             | I   | DE or HV mode control                    | Note 3  |
| 9       | DE               | I   | Data enable                              |         |
| 10      | VSYNC            | I   | Vsync signal input                       |         |
| 11      | HSYNC            | I   | Hsync signal input                       |         |
| 12      | GND              | P   | Power ground                             |         |
| 13      | B5               | I   | Blue data input (MSB)                    |         |
| 14      | B4               | I   | Blue data input                          |         |
| 15      | B3               | I   | Blue data input                          |         |
| 16      | GND              | P   | Power ground                             |         |
| 17      | B2               | I   | Blue data input                          |         |
| 18      | B1               | I   | Blue data input                          |         |
| 19      | B0               | I   | Blue data input(LSB)                     |         |
| 20      | GND              | P   | Power ground                             |         |
| 21      | G5               | I   | Green data input(MSB)                    |         |
| 22      | G4               | I   | Green data input                         |         |
| 23      | G3               | I   | Green data input                         |         |
| 24      | GND              | P   | Power ground                             |         |
| 25      | G2               | I   | Green data input                         |         |


|    |      |   |   |         |
|----|------|---|---|---------|
| 26 | G1   | I | Green data input                        |         |
| 27 | G0   | I | Green data input(LSB)                   |         |
| 28 | GND  | P | Power ground                            |         |
| 29 | R5   | I | Red data input(MSB)                     |         |
| 30 | R4   | I | Red data input                          |         |
| 31 | R3   | I | Red data input                          |         |
| 32 | GND  | P | Power ground                            |         |
| 33 | R2   | I | Red data input                          |         |
| 34 | R1   | I | Red data input                          |         |
| 35 | R0   | I | Red data input(LSB)                     |         |
| 36 | GND  | P | Power ground                            |         |
| 37 | DCLK | I | Sample clock                            |         |
| 38 | GND  | P | Power ground                            |         |
| 39 | L/R  | I | Select left to right scanning direction | Note4,5 |
| 40 | U/D  | I | Select up or down scanning direction    | Note4,5 |

Note: I: input, O: output t, P: Power

Note1:ADJ adjust brightness to control Pin,Pulse duty the bigger brighter.

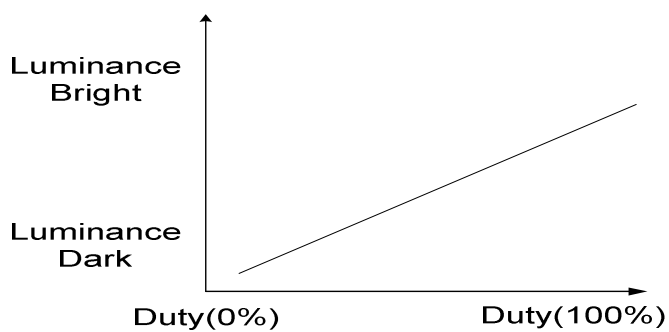


Note 2:ADJ signal=0~3.3V,operation frequency:100~300Hz

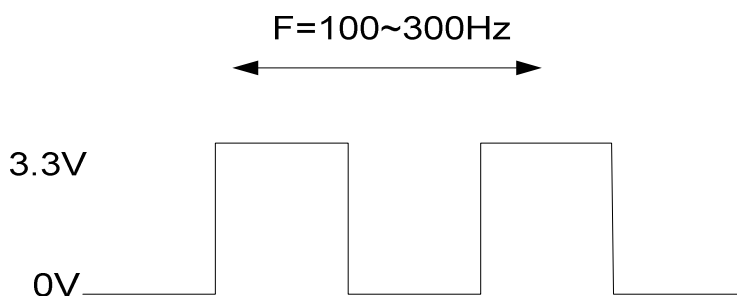

Note 3: DE Mode, Mode="H", HS floating and VS floating  
 HV Mode, Mode="L" and DE floating  
 Note4: Selection of scanning mode

| Setting of scan control input |                 | Scanning direction        |
|-------------------------------|-----------------|---------------------------|
| U/D                           | R/L             |                           |
| GND                           | V <sub>CC</sub> | Up to down, left to right |
| V <sub>CC</sub>               | GND             | Down to up, right to left |
| GND                           | GND             | Up to down, right to left |
| V <sub>CC</sub>               | V <sub>CC</sub> | Down to up, left to right |

Note 5: Definition of scanning direction.  
 Refer to the figure as below:

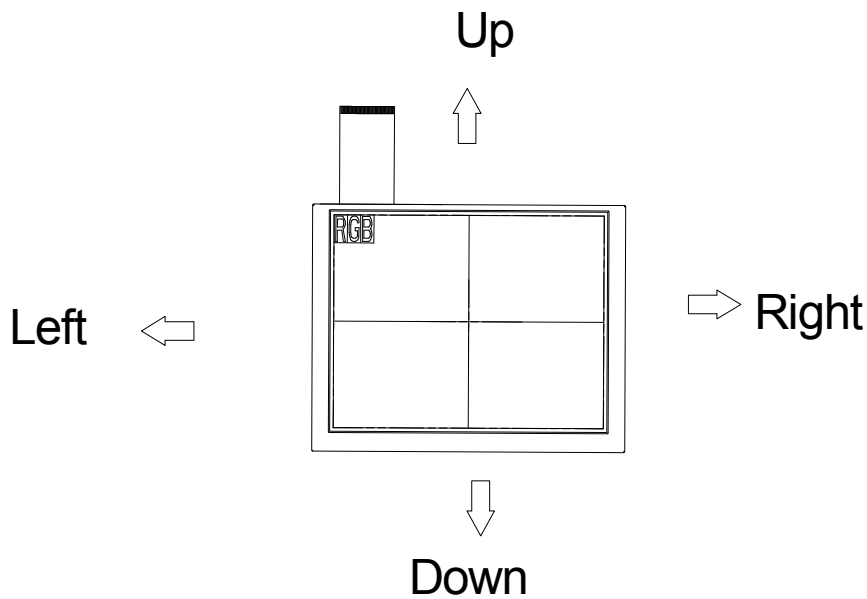

## 3.Operation Specifications

### 3.1.Absolute Maximum Rating

| Item                  | Symbol    | Values |      | Unit | Remark |
|-----------------------|-----------|--------|------|------|--------|
|                       |           | Min.   | Max. |      |        |
| Power voltage         | $V_{CC}$  | -0.3   | 7    | V    |        |
|                       | $V_{LED}$ | 4.5    | 5.5  | V    |        |
| Operation Temperature | $T_{OP}$  | -20    | 70   | °C   |        |
| Storage Temperature   | $T_{ST}$  | -30    | 80   | °C   |        |

Note: The absolute maximum rating values of this product are not allowed to be exceeded at any times. A module should be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme condition, the module may be permanently destroyed.

### 3.2. Typical Operation Conditions

| Item                     | Symbol    | Values      |      |             | Unit | Remark |
|--------------------------|-----------|-------------|------|-------------|------|--------|
|                          |           | Min.        | Typ. | Max.        |      |        |
| Power voltage            | $V_{CC}$  | 3.1         | 3.3  | 3.5         | V    | Note 1 |
|                          | $V_{LED}$ | 4.8         | 5.0  | 5.2         | V    | Note 2 |
| Current consumption      | $I_{CC}$  | -           | 200  | 300         | mA   |        |
|                          | $I_{LED}$ | -           | 300  | 400         | mA   | Note 3 |
| Input logic high voltage | $V_{IH}$  | $0.7V_{CC}$ | -    | $1V_{CC}$   | V    | Note 4 |
| Input logic low voltage  | $V_{IL}$  | 0           | -    | $0.3V_{CC}$ | V    |        |
| LED life time            | -         | 20,000      | -    | -           | Hr   | Note 5 |

Note 1:  $V_{CC}$  setting should match the signals output voltage (refer to Note 4) of customer's system board.


Note 2: LED driving voltage.

Note 3: LED driving current.

Note 4: DCLK, DE, HS, VS, R0~ R5,, G0~ G5, B0~ B5.

Note 5: The "LED life time" is defined as the module brightness decrease to 50% original brightness at  $T_a=25^{\circ}\text{C}$  and  $V_{LED}=5.0\text{V}$ . The LED lifetime could be decreased if operating  $V_{LED}$  is larger than 5.0V.

### 3.3. Power Sequence

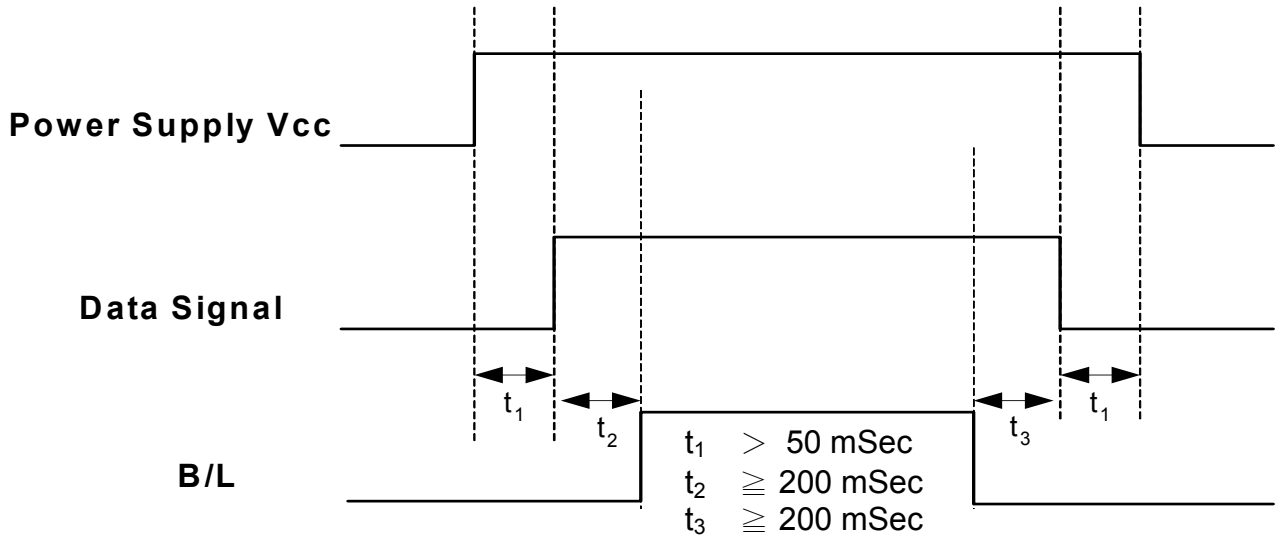

Note: Data includes DE, VSYNC, HSYNC, B0~B5, G0~G5, R0~R5, DCLK.

### 3.4. Timing Characteristics

#### 3.4.1. Timing Conditions

Input/Output Timing

| Item              | Symbol | Values |       |      | Unit. | Remark         |
|-------------------|--------|--------|-------|------|-------|----------------|
|                   |        | Min.   | Typ.  | Max. |       |                |
| PXLCLK clock time | Tclk   | 33.3   | 39.7  | -    | ns    | 1 Tclk         |
| PXLCLK pulse duty | Tcwh   | 40     | 50    | 60   | %     | Tclk           |
| DATA set-up time  | Tdsu   | 12     | -     | -    | ns    | DATA to PXLCLK |
| DATA hold time    | Tdhd   | 12     | -     | -    | ns    | DATA to PXLCLK |
| DE setup time     | Tesu   | 12     | -     | -    | ns    | DE to PXLCLK   |
| VSYNC setup time  | Tvst   | 12     | -     | -    | ns    |                |
| VSYNC hold time   | Tvhd   | 12     | -     | -    | ns    |                |
| HSYNC setup time  | Thst   | 12     | -     | -    | ns    |                |
| HSYNC hold time   | Thhd   | 12     | -     | -    | ns    |                |
| HSYNC period time | Th     | 60     | 63.56 | 67   | us    |                |
| HSYNC width       | Thwh   | 1      | -     | -    | Tclk  |                |
| VSYNC width       | Tvwh   | 1      | -     | -    | Th    |                |
| HSYNC to CLKIN    | Thc    | -      | -     | 1    | Tclk  |                |


#### DE Mode input Timing Limitation

| DE Mode | Values |      |      | Unit | Remark     |
|---------|--------|------|------|------|------------|
|         | Min.   | Typ. | Max. |      |            |
| THC     | 48     | 160  | 765  | tclk |            |
| THD     | 640    | 640  | 640  | tclk |            |
| TH      | 688    | 800  | 1405 | tclk | 1TH=1line  |
| TVC     | 6      | 45   | 255  | Line |            |
| TVD     | 480    | 480  | 480  | line |            |
| TV      | 486    | 525  | 735  | line | 1TV=1field |


## HV Mode input Timing Limitation

| HV Mode | Values |      |      | Unit | Remark     |
|---------|--------|------|------|------|------------|
|         | Min.   | Typ. | Max. |      |            |
| Thwh    | -      | 10   | -    | tclk |            |
| Thbp    | -      | 134  | -    | tclk |            |
| Thfp    | -      | 16   | -    | tclk |            |
| THD     | -      | 640  | -    | tclk |            |
| TH      | -      | 800  | -    | line |            |
| Tvwh    | -      | 2    | -    | line |            |
| Tvbp    | -      | 11   | -    | line |            |
| Tvfp    | -      | 32   | -    | line |            |
| TVD     | -      | 480  | -    | line |            |
| TV      | -      | 525  | -    | line | 1TV=1field |


### 3.4.2. Timing Diagram

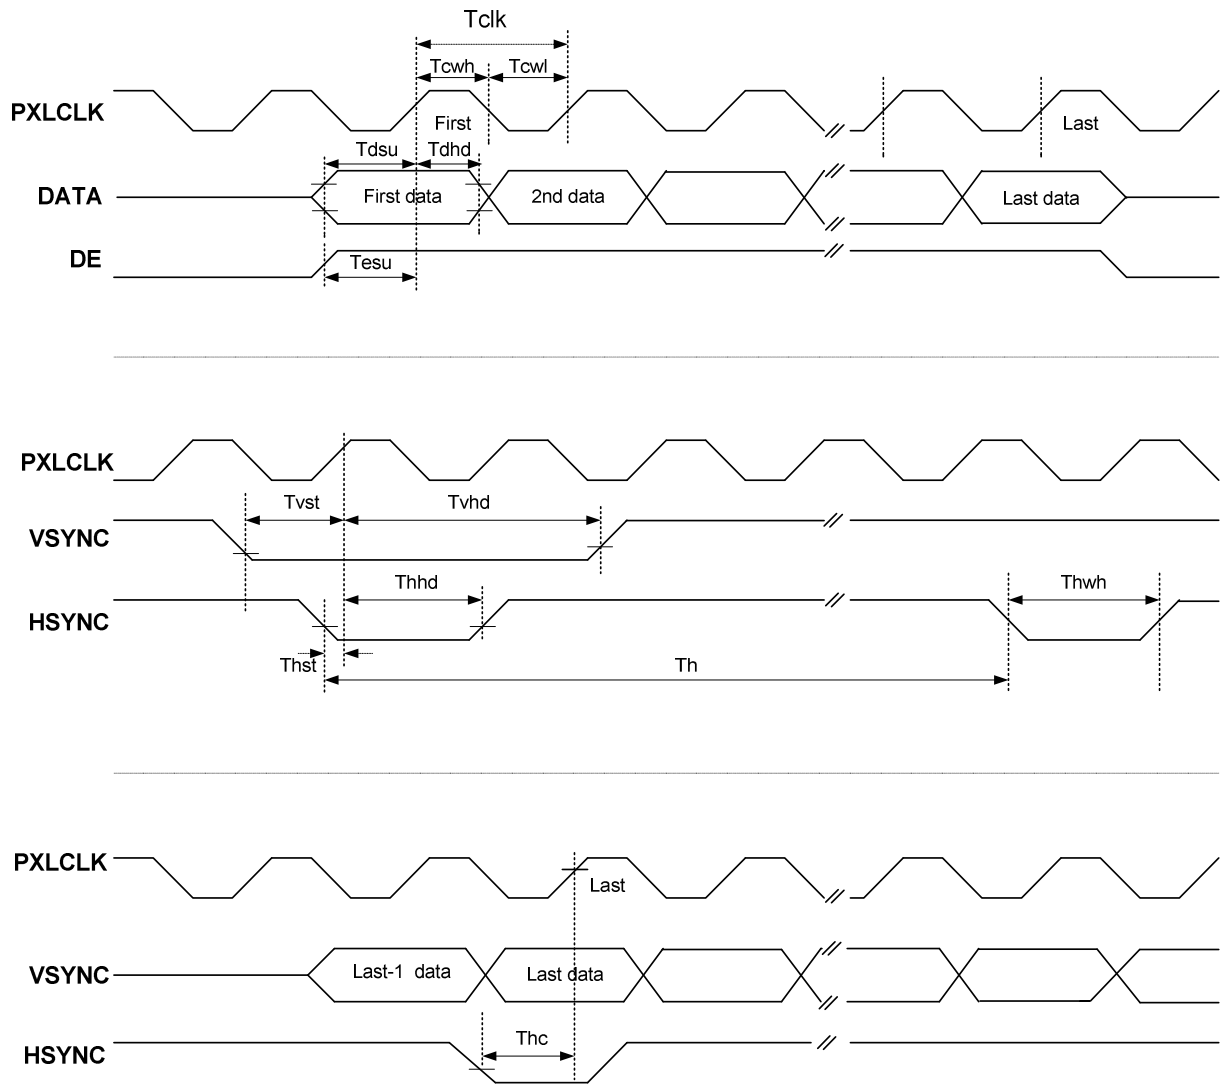


**Fig.3-1 Clock and Data Input Timing Diagram**

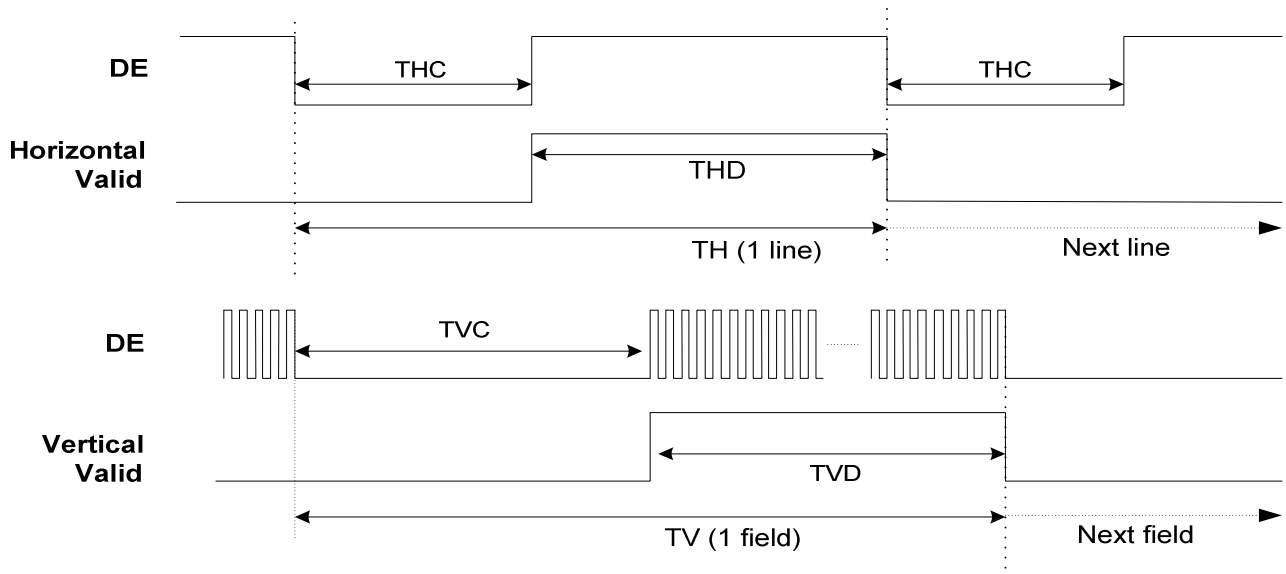

**Fig.3-2 DE Mode Input Timing**

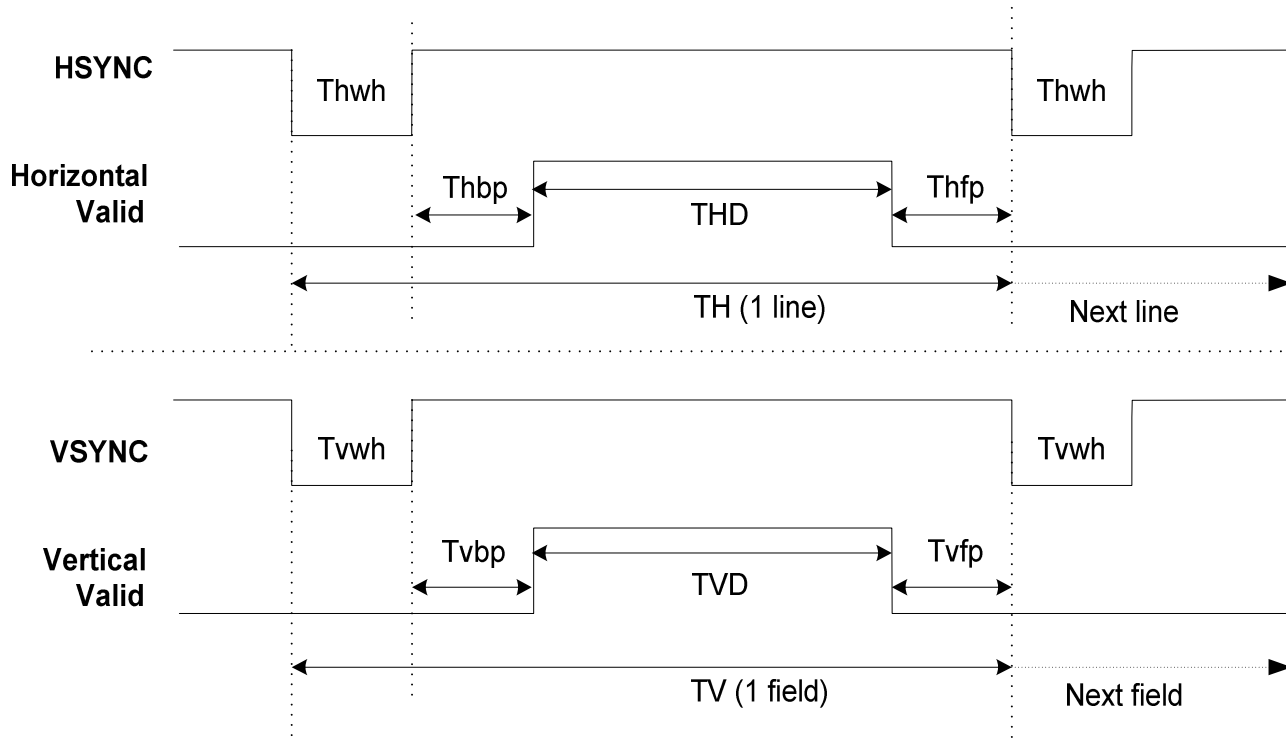

**Fig.3-3 HV Mode Input Timing**

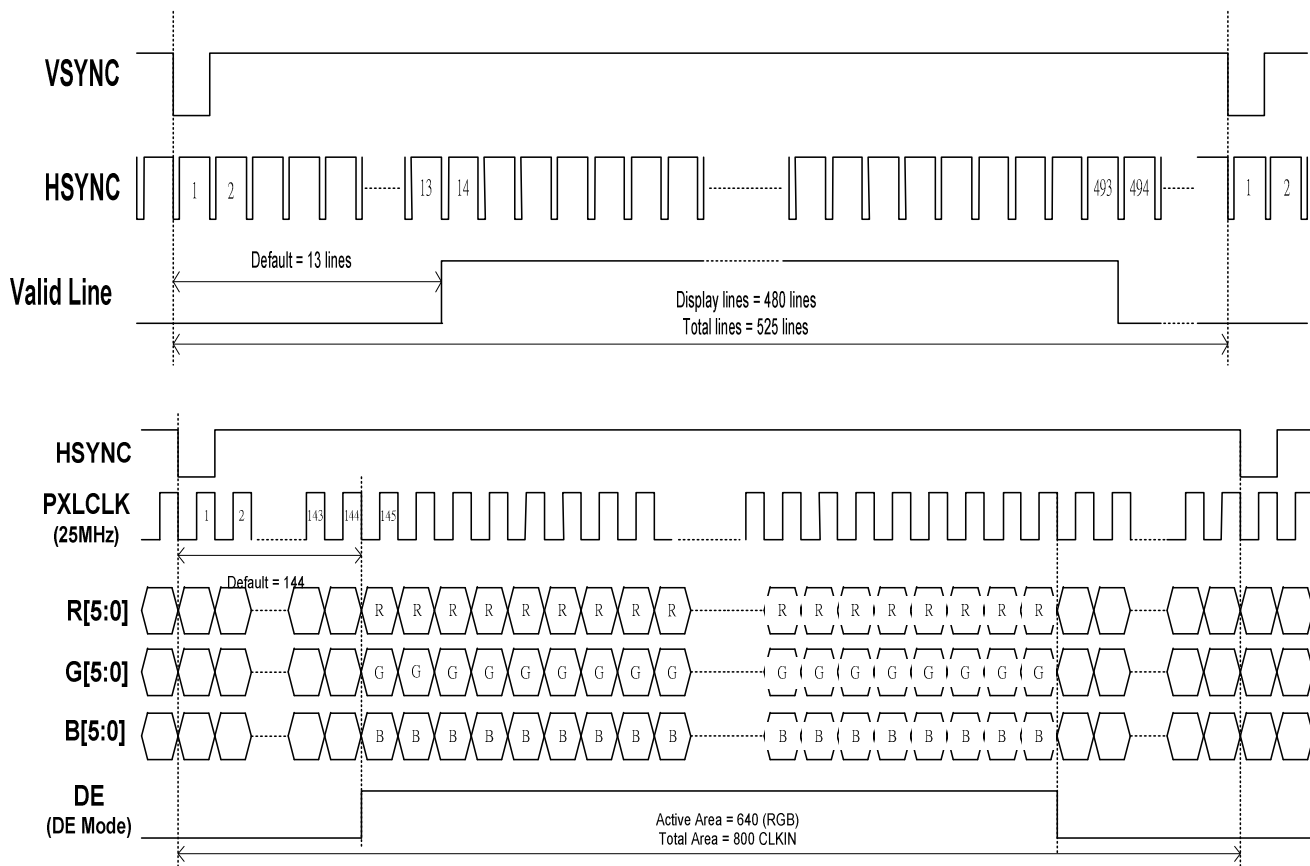

**Fig. 3-4 18 bit RGB mode for 640 x(RGB)x 480**

## 4.Optical Specification

| Item                     | Symbol     | Condition                       | Values |      |      | Unit              | Remark                     |
|--------------------------|------------|---------------------------------|--------|------|------|-------------------|----------------------------|
|                          |            |                                 | Min.   | Typ. | Max. |                   |                            |
| Viewing angle<br>(CR≥10) | $\theta_L$ | $\Phi=180^\circ$ (9 o'clock)    | 60     | 70   | -    | degree            | Note 1                     |
|                          | $\theta_R$ | $\Phi=0^\circ$ (3 o'clock)      | 60     | 70   | -    |                   |                            |
|                          | $\theta_T$ | $\Phi=90^\circ$ (12 o'clock)    | 40     | 50   | -    |                   |                            |
|                          | $\theta_B$ | $\Phi=270^\circ$ (6 o'clock)    | 60     | 70   | -    |                   |                            |
| Response time            | $T_{ON}$   | Normal<br>$\theta=\Phi=0^\circ$ | -      | 10   | 20   | msec              | Note 3                     |
|                          | $T_{OFF}$  |                                 | -      | 15   | 30   | msec              | Note 3                     |
| Contrast ratio           | CR         |                                 | 400    | 500  | -    | -                 | Note 4                     |
| Color chromaticity       | $W_X$      |                                 | 0.26   | 0.31 | 0.36 | -                 | Note 2<br>Note 5<br>Note 6 |
|                          | $W_Y$      |                                 | 0.28   | 0.33 | 0.38 | -                 |                            |
| Luminance                | L          |                                 | 300    | 350  | -    | cd/m <sup>2</sup> | Note 6                     |
| Luminance uniformity     | $Y_U$      |                                 | 70     | 75   | -    | %                 | Note 6,7                   |

### Test Conditions:

1.  $V_{CC}=3.3V$ ,  $V_{LED}=5.0V$ , the ambient temperature is  $25^\circ C$ .
2. The test systems refer to Note 2.

Note 1: Definition of viewing angle range

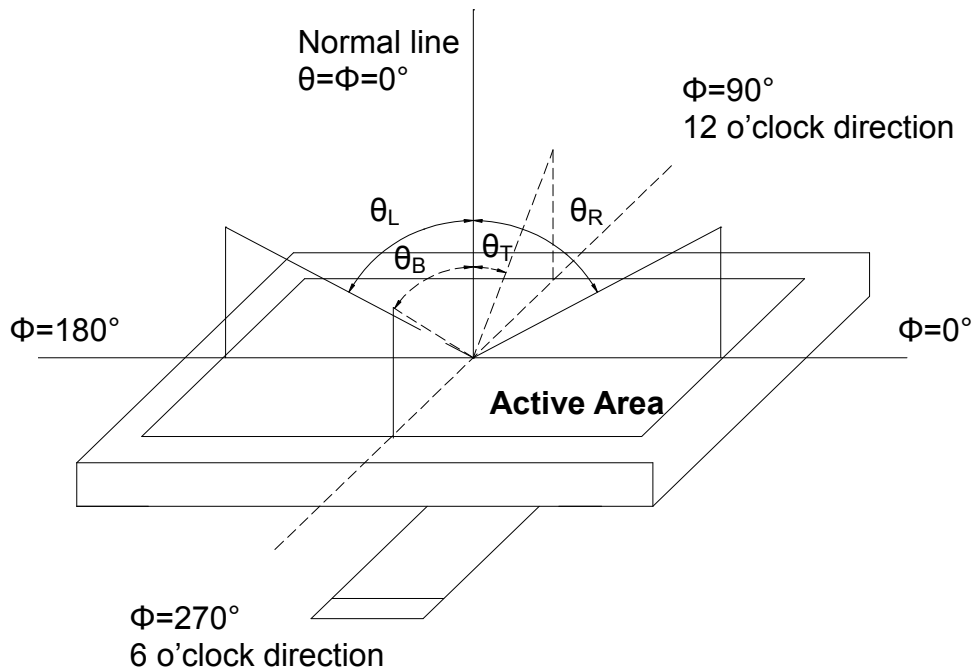


Fig. 4-1 Definition of viewing angle

Note 2: Definition of optical measurement system.

The optical characteristics should be measured in dark room. The optical properties are measured at the center point of the LCD screen. (Response time is measured by Photo detector TOPCON BM-7, other items are measured by BM-5A/Field of view:  $1^\circ$  /Height: 500mm.)

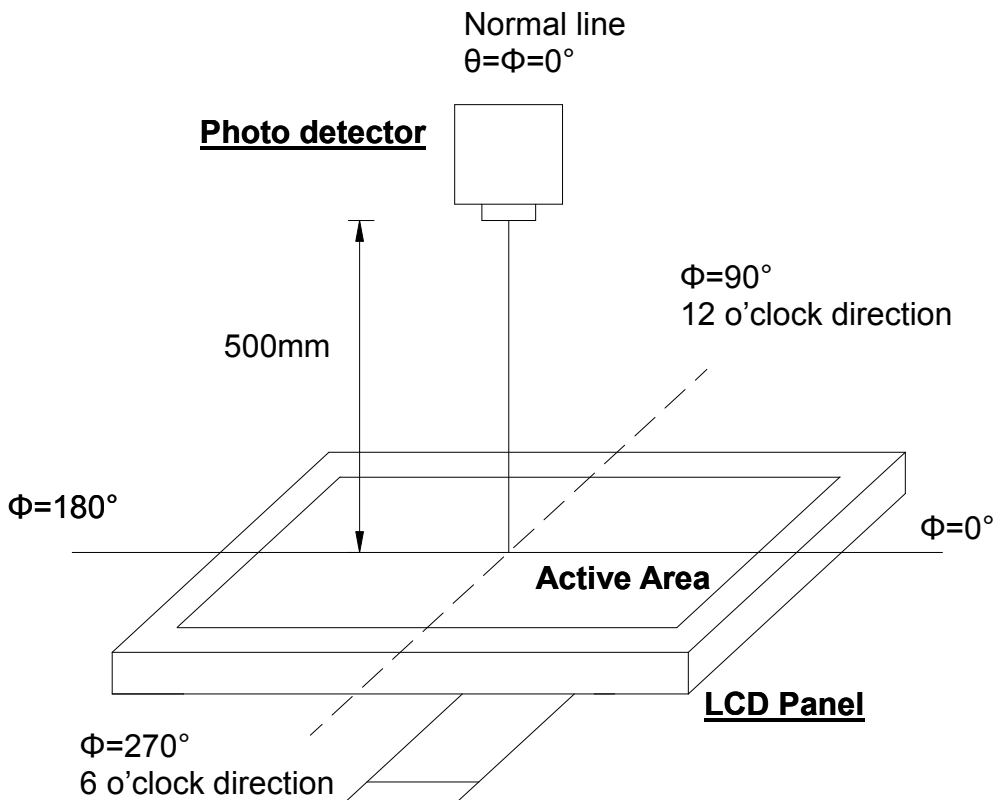


Fig. 4-2 Optical measurement system setup

Note 3: Definition of Response time

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time ( $T_{ON}$ ) is the time between photo detector output intensity changed from 90% to 10%. And fall time ( $T_{OFF}$ ) is the time between photo detector output intensity changed from 10% to 90%.

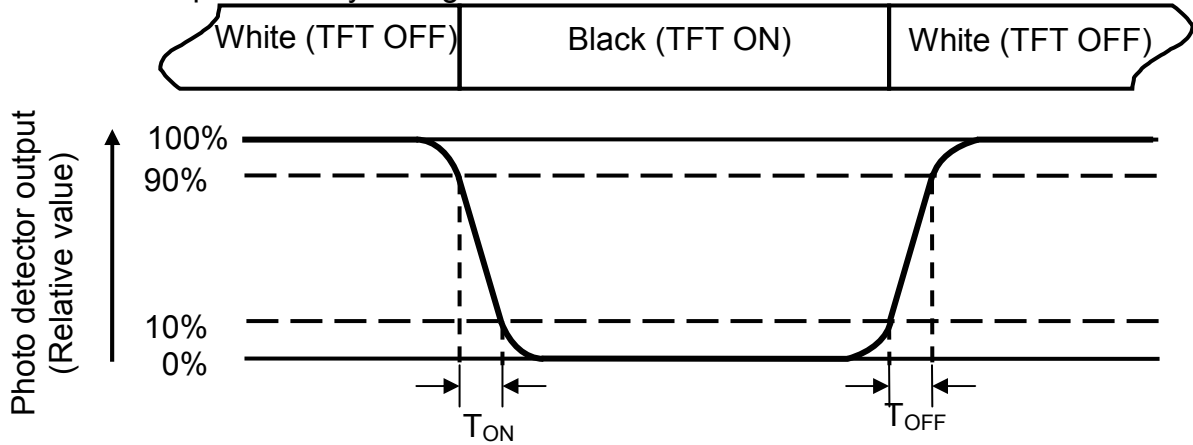


Fig. 4-3 Definition of response time

Note 4: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note 6: All input terminals LCD panel must be ground while measuring the center area of the panel. The LED driving condition is  $V_{LED} = 5.0 \text{ V}$ .

Note 7: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer to Fig. 4-4 ).Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity } (Yu) = \frac{B_{min}}{B_{max}}$$

L-----Active area length      W----- Active area width

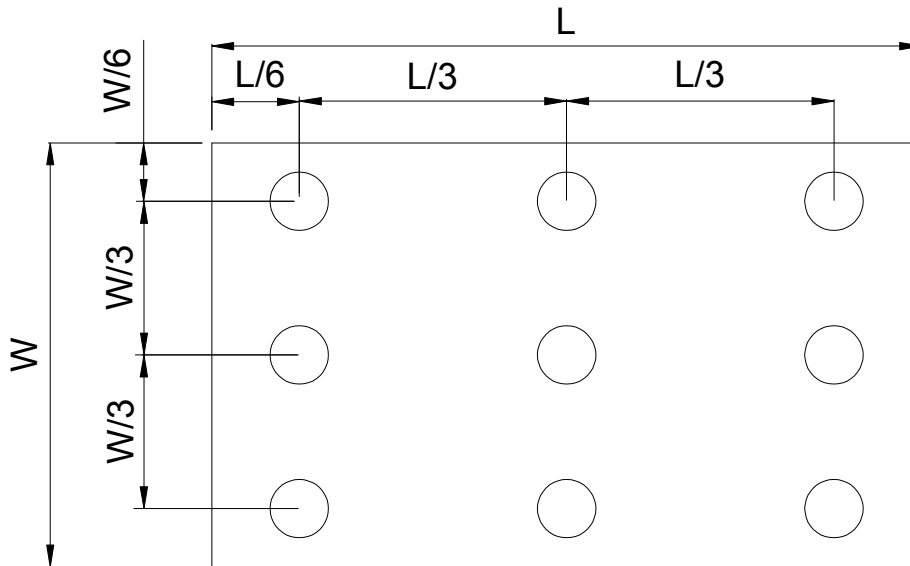


Fig. 4-4 Definition of measuring points

$B_{max}$ : The measured maximum luminance of all measurement position.

$B_{min}$ : The measured minimum luminance of all measurement position.



## 6. General Precautions

### 6.1. Safety

Liquid crystal is poisonous. Do not put it in your mouth. If liquid crystal touches your skin or clothes, wash it off immediately by using soap and water.

### 6.2. Handling

1. The LCD panel is plate glass. Do not subject the panel to mechanical shock or to excessive force on its surface.
2. The polarizer attached to the display is easily damaged. Please handle it carefully to avoid scratch or other damages.
3. To avoid contamination on the display surface, do not touch the module surface with bare hands.
4. Keep a space so that the LCD panels do not touch other components.
5. Put cover board such as acrylic board on the surface of LCD panel to protect panel from damages.
6. Transparent electrodes may be disconnected if you use the LCD panel under environmental conditions where the condensation of dew occurs.
7. Do not leave module in direct sunlight to avoid malfunction of the ICs.

### 6.3. Static Electricity

1. Be sure to ground module before turning on power or operating module.
2. Do not apply voltage which exceeds the absolute maximum rating value.


### 6.4. Storage

1. Store the module in a dark room where must keep at  $25\pm 10^{\circ}\text{C}$  and 65%RH or less.
2. Do not store the module in surroundings containing organic solvent or corrosive gas.
3. Store the module in an anti-electrostatic container or bag.

### 6.5. Cleaning

1. Do not wipe the polarizer with dry cloth. It might cause scratch.
2. Only use a soft sloth with IPA to wipe the polarizer, other chemicals might permanent damage to the polarizer.

# 7.Mechanical Drawing

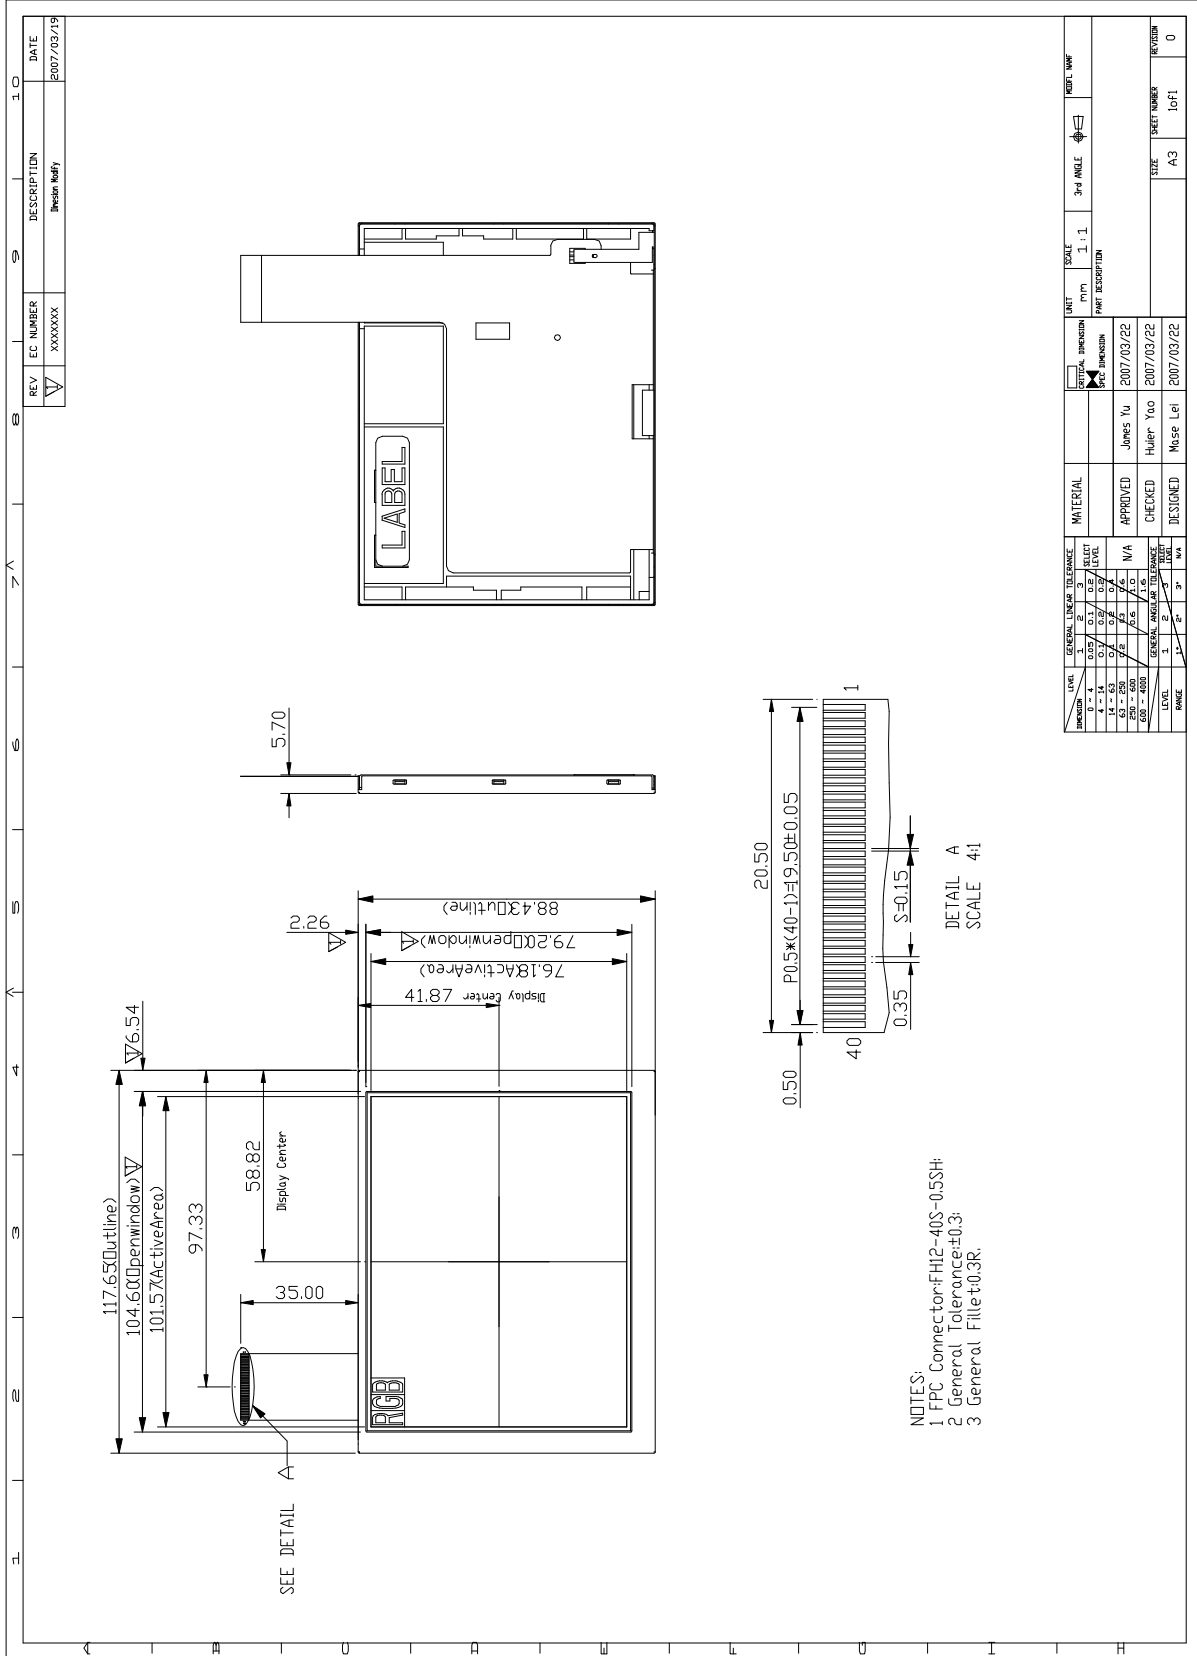

- NOTES:
- 1 FPC Connector: FH12-40S-0.5SH
  - 2 General Tolerance: ±0.3
  - 3 General Fillet: R0.3R

|     |           |             |            |
|-----|-----------|-------------|------------|
| REV | EC NUMBER | DESCRIPTION | DATE       |
| V   | XXXXXX    | Imeson 1057 | 2007/03/19 |

|      |       |           |           |
|------|-------|-----------|-----------|
| UNIT | SCALE | 3rd ANGLE | POST NAME |
| M/M  | 1:1   |           |           |

|          |            |          |
|----------|------------|----------|
| APPROVED | CHECKED    | DESIGNED |
| James Yu | Huijue Yao | Mase Lei |

|              |            |
|--------------|------------|
| DATE         | 2007/03/22 |
| SIZE         | A3         |
| SHEET NUMBER | 10/1       |
| TOTAL SHEETS | 0          |

| LEVEL      | GENERAL TOLERANCE | ANGULAR TOLERANCE | LEVEL |
|------------|-------------------|-------------------|-------|
| 0 - 4      | 0.15              | 0.5               | 1     |
| 4 - 14     | 0.2               | 0.7               | 2     |
| 14 - 20    | 0.3               | 1.0               | 3     |
| 20 - 30    | 0.4               | 1.5               | 4     |
| 30 - 50    | 0.5               | 2.0               | 5     |
| 50 - 80    | 0.6               | 2.5               | 6     |
| 80 - 100   | 0.8               | 3.0               | 7     |
| 100 - 150  | 1.0               | 4.0               | 8     |
| 150 - 200  | 1.2               | 5.0               | 9     |
| 200 - 300  | 1.5               | 6.0               | 10    |
| 300 - 400  | 2.0               | 8.0               | 11    |
| 400 - 500  | 2.5               | 10.0              | 12    |
| 500 - 600  | 3.0               | 12.0              | 13    |
| 600 - 800  | 4.0               | 16.0              | 14    |
| 800 - 1000 | 5.0               | 20.0              | 15    |

## 8.Package Drawing

### 8.1.Packaging Material Table

| No. | Item             | Model (Material)   | Dimensions(mm)   | Unit Weight (kg) | Quantity | Remark |
|-----|------------------|--------------------|------------------|------------------|----------|--------|
| 1   | LCM Module       | OSD050TN22         | 117.65X88.43X5.7 | 0.075            | 68pcs    |        |
| 2   | Partition        | B Corrugated paper | 512 X 349 X 226  | 1.150            | 1set     |        |
| 3   | Corrugated Bar   | B Corrugated paper | 349 X 198 X 49   | 0.316            | 1set     |        |
| 4   | Corrugated Board | B Corrugated paper | 512 X 349        | 0.098            | 2pcs     |        |
| 5   | Dust-Proof Bag   | PE                 | 700 X 530        | 0.0604           | 1pcs     |        |
| 6   | A/S Bag          | PE                 | 180 X 133 X 0.2  | 0.0018           | 68pcs    |        |
| 7   | Carton           | Corrugated paper   | 530 X 355 X 255  | 1.100            | 1 pcs    |        |
| 8   | Total Weight     | 7.8kg ± 5%         |                  |                  |          |        |

### 8.2.Packaging Quantity

|  |
|--|
| Total LCM quantity in Carton: no. of Partition      4 Rows x quantity per Row 17= 68 |
|--|